



DECLARATION OF PERFORMANCE

Ref.: Rapporten\Algemeen\ETA

p. 1/2

15/09/14

DECLARATION OF PERFORMANCE

ZINGA®

| | |
|------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Identification code of the product-type | ZINGA® |
| 2. Type, batch or serial number | Film Galvanising System (Batch n°: see label) |
| 3. Intended use or uses, in accordance with ETA, as foreseen by the applicator | <p>The product is suitable for internal or external use as a primer and/or final corrosion protection layer for structural steel. The product can be applied at a range of thicknesses. For the purposes of this ETA the nominal final dry film thickness should be 180 µm.</p> <p>In certain areas it may be necessary to apply a protective topcoat over the product. In such cases precautions should be taken to minimise exposure of the product to any solvent contained in the topcoat (or any tie coats which may be used), by applying a very thin first coat and leaving to dry thoroughly before further applications. The compatibility of topcoats is outside the scope of this ETA and should be confirmed before application.</p> <p>The product is used in areas where Essential Requirements 1 Mechanical resistance and Stability and 2 Safety in case of fire of the Directive 89/106/EEC, including the aspect of durability, apply.</p> |
| 4. Name and contact address of the manufacturer | <p>Zingametall BVBA Rozenstraat 4 9810 Eke BELGIUM Tel: +32(0)9 385 68 81 Fax: +32(0)9 385 58 69 e-mail: zingametall@zinga.be web: www.zinga.eu</p> |
| 5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2) | Not relevant |
| 6. System or systems of assessment and verification of constancy of performance of the construction product | <p>According to the decision 2003/656/EC of the European Commission, the systems of Attestation of Conformity applied to this product are:</p> <ul style="list-style-type: none">• Concerning corrosion protection of steel – System 4• Concerning reaction to fire – System 3 |
| 7. Notified body (hEN) | Not relevant |



DECLARATION OF PERFORMANCE

Ref.: Rapporten\Algemeen\ETA


p. 2/2

15/09/14

| 8. Notified body (ETA) | <p>British Board of Agrément Issued ETA-13/0790 On the basis of CUAP Anticorrosion paint for steel (12.02/04). Performed:</p> <ol style="list-style-type: none"> 1. An assessment of the subject's ability to enable the works to meet the relevant Essential Requirements contained in EEC Directive 891106 EEC (CPD) as set out in Common Understanding of Assessment Procedure (CUAP) in Product Sector Anti-corrosion paint for steel. 2. An evaluation of the existing data, reports and calculations. 3. Preparation and circulation of a draft European Technical Approval and supporting documentation for comment to the General Secretariat of EOTA and other EOTA bodies nominated by the member states to operate in the subject area and others deemed appropriate by the BBA. | | | | | | | | | | | |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--|---------------------------|-------------|---------------|------------------|----------|-----------|-------------------------------|----------------------------------------------------|-----------|
| 9. Declared performance | <table border="1"> <thead> <tr> <th>Essential characteristics</th> <th>Performance</th> <th>Test Standard</th> </tr> </thead> <tbody> <tr> <td>Reaction to fire</td> <td>Bs-1, d0</td> <td>EN13501-1</td> </tr> <tr> <td>Corrosion protection of steel</td> <td>C5-I High C5-M High Im2 Medium Im3 Medium</td> <td>ISO 12944</td> </tr> </tbody> </table> | | | Essential characteristics | Performance | Test Standard | Reaction to fire | Bs-1, d0 | EN13501-1 | Corrosion protection of steel | C5-I High C5-M High Im2 Medium Im3 Medium | ISO 12944 |
| Essential characteristics | Performance | Test Standard | | | | | | | | | | |
| Reaction to fire | Bs-1, d0 | EN13501-1 | | | | | | | | | | |
| Corrosion protection of steel | C5-I High C5-M High Im2 Medium Im3 Medium | ISO 12944 | | | | | | | | | | |
| 10. Declaration | <p>The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance (DoP) is issued under the sole responsibility of the manufacturer identified in point 4.</p> | | | | | | | | | | | |

Signed for and on behalf of the manufacturer by:

Bruno Saverys, C.E.O.

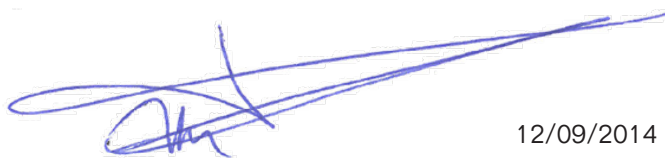

12/09/2014

Legal note:

This information is given in good faith based on Zingametall's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Zingametall's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Zingametall reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Technical Data Sheet for the product concerned, copies of which will be supplied on request.